


## PRELIMINARY DATASHEET

### Phase Control Thyristor, Half-Bridge Configuration In iQPak® Power Module Package

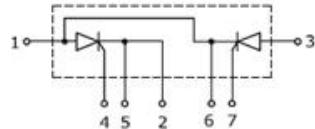

#### FEATURES

- Electrically isolated baseplate
- High surge capability
- General purpose thyristor and diode
- High voltage/ high current
- Pb free finished; **RoHS compliant**



#### MAXIMUM RATINGS (per Leg)

Parameter	Symbol	Value	Units
Average on-state current $T_c = 85^\circ\text{C}$ , 180°C conduction, half sine wave	$I_{T(AV)}$	95	A
Non-repetitive surge peak on-state current At $t_p=10 \text{ ms}$ , 100% $V_{RRM}$ , sine pulse, initial $T_j = T_j \text{ max.}$	$I_{TSM}$	1785	
Peak reverse and off-state leakage current At 100% $V_{RRM}/V_{DRM}$ $T_j = T_j \text{ max.}$	$I_{RRM} / I_{DRM}$	20	mA
$I^2t$ value for fusing At $t_p=10 \text{ ms}$ , 100% $V_{RRM}$ , sine half-wave, initial $T_j = T_j \text{ max.}$	$I^2t$	15900	$\text{A}^2\text{s}$
Repetitive peak off-state voltage	$V_{DRM}$	1800	V
Repetitive reverse voltage	$V_{RRM}$	1800	
Maximum critical rate of rise of off-state voltage $T_j=125^\circ\text{C}$ , linear to 67% $V_{DRM}$	$dV/dt$	1000	$\text{V}/\mu\text{s}$
Peak gate current	$I_{GM}$	3.0	A
Peak gate power	$P_{GM}$	12	W
Operating junction and storage temperature	$T_j, T_{stg}$	-40... +125	$^\circ\text{C}$


#### Thermal and Isolation Characteristics

Parameter	Symbol	Max. Value	Units
<b>Characteristics</b>			
Thyristor Thermal resistance, junction to case, per Leg	$R_{thJC}$	0.28	K/W
Isolation voltage, RMS (measured between terminals and case, 50-60Hz for 1-3 seconds)	$V_{iso}$	3000	V

#### Electrical Characteristics (per Leg), at $T_j = 25^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
Gate trigger voltage $V_{AK}=6\text{V}$ , resistive load	$V_{GT}$	-	-	1.5	V
Gate trigger current $V_{AK}=6\text{V}$ , resistive load	$I_{GT}$	30	-	150	mA
Holding Current $V_{AK}=6\text{V}$ , $I_t=1\text{A}$ , resistive load	$I_H$	-	-	220	mA
Latching current $V_{AK}=6\text{V}$ , $I_t=1\text{A}$ , resistive load	$I_L$	-	-	400	mA
On-state or forward voltage $I_t = 300\text{A}$ $I_t = 200\text{A}$	$V_{TM}$	-	-	1.65 1.50	V
			1.34		

### Package Outline Drawing

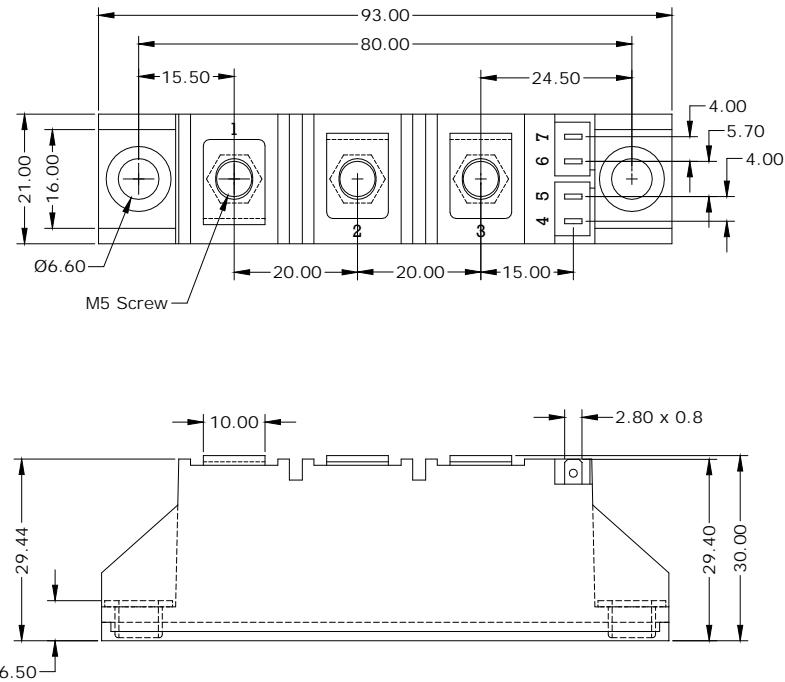

### Disclaimer

These specifications may not be considered as a guarantee of components characteristics. Components have to be tested depending on intended application as adjustments may be necessary. The use of **iQXPRZ Power Inc.** components in life support appliances and systems are subject to written approval of **iQXPRZ Power Inc.**