


**PRELIMINARY DATASHEET**
**Fast Recovery 15A, 1200V Epitaxial Diodes,  
 in TO247 B1 version Package**
**APPLICATIONS**

- Freewheeling diode (FWD)
- Snubber diode
- Clamp diode
- Power factor correction (PFC)
- Plating power supply
- Ultrasonic cleaner and welder
- Converter and chopper
- Uninterruptible power supplies
- High speed rectifiers
- Inductive heating and melting applications


**FEATURES**

- Ultrafast recovery time
- Soft recovery characteristics
- Low recovery loss
- Low forward voltage
- High surge current capability
- Low leakage current
- Pb-free finished; **RoHS compliant**

**MAXIMUM RATINGS**

Parameter	Symbol	Value	Units
Repetitive peak reverse voltage	$V_{RRM}$	1200	V
Average forward current $T_c = 110^\circ\text{C}$	$I_{F(AV)}$	15	A
RMS forward current $T_c = 110^\circ\text{C}$	$I_{F(RMS)}$	22	
Surge non-repetitive forward current $T_j = 45^\circ\text{C}$ , $t_p = 10$ ms, 50Hz, Sine	$I_{FSM}$	180	
Operating junction and storage temperature	$T_j, T_{stg}$	-40... +150	$^\circ\text{C}$

**Thermal Characteristics**


Parameter	Symbol	Max. Value	Units
<b>Characteristics</b>			
Thermal resistance, junction to case	$R_{thJC}$	1.5	$^\circ\text{C}/\text{W}$

**Electrical Characteristics, at  $T_j = 25^\circ\text{C}$ , unless otherwise specified**

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
<b>Static Characteristics</b>					
Reverse leakage current $V_R = 1200\text{V}$ $V_R = 1200\text{V}$ , $T_j = 125^\circ\text{C}$	$I_R$	-	-	100 500	$\mu\text{A}$
Forward voltage drop $I_F = 15\text{A}$	$V_F$	-	2.10	2.50	V

**Electrical Characteristics**, at  $T_j = 25^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
<b>Dynamic Characteristics</b>					
Reverse recovery time $V_R = 30\text{V}$ , $I_F = 1\text{A}$ , $di_F/dt = -200\text{A}/\mu\text{s}$ $V_R = 600\text{V}$ , $I_F = 15\text{A}$ , $di_F/dt = -200\text{A}/\mu\text{s}$ $V_R = 600\text{V}$ , $I_F = 15\text{A}$ , $di_F/dt = -200\text{A}/\mu\text{s}$ , $T_j = 125^\circ\text{C}$	$t_{rr}$	-	25 55 260	-	ns
Maximum reverse recovery current $V_R = 600\text{V}$ , $I_F = 15\text{A}$ , $di_F/dt = -200\text{A}/\mu\text{s}$ $V_R = 600\text{V}$ , $I_F = 15\text{A}$ , $di_F/dt = -200\text{A}/\mu\text{s}$ , $T_j = 125^\circ\text{C}$	$I_{rrm}$	-	3.5 6.5	-	A

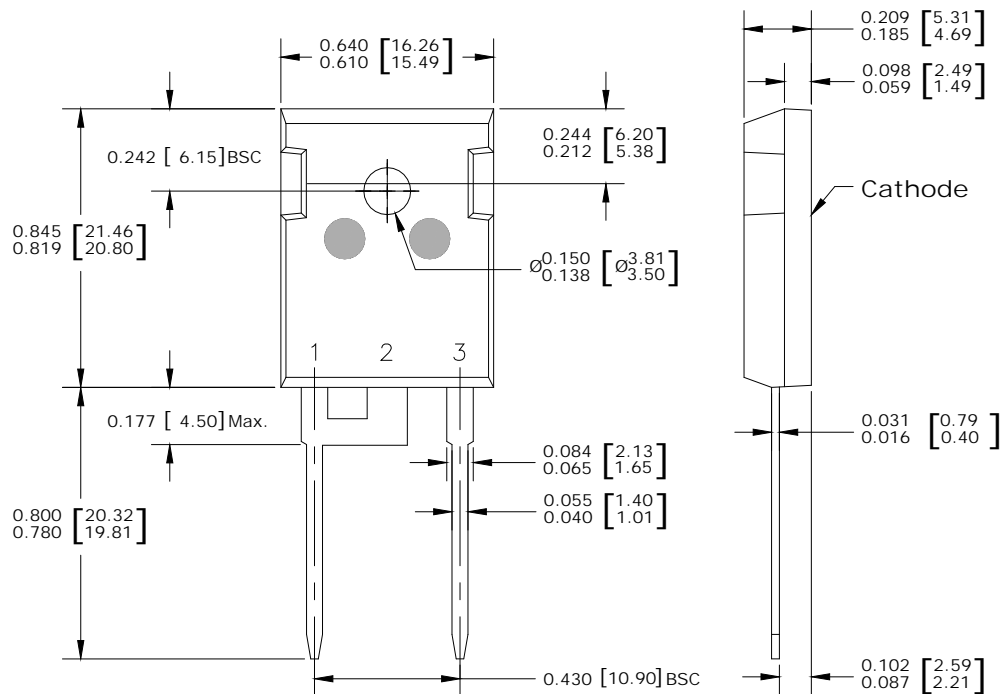**Package Outline Drawing**

**Disclaimer**

These specifications may not be considered as a guarantee of components characteristics. Components have to be tested depending on intended application as adjustments may be necessary. The use of **iQXPRZ Power Inc.** components in life support appliances and systems are subject to written approval of **iQXPRZ Power Inc.**