


## Fast Recovery, 75A, 600V Diodes In Isolated SOT227 Package

### APPLICATIONS

- Switch mode power supplies (SMPS) rectifiers
- Resonant applications
- Industrial drives

### FEATURES

- Fast recovery
- Soft switching
- Low reverse recovery charge
- Low forward voltage drop
- Low leakage current
- Pb-free finished; **RoHS compliant**



### MAXIMUM RATINGS

Parameter	Symbol	Value	Units
Repetitive peak reverse voltage	$V_{RRM}$	600	V
Continuous forward current $T_C = 25^\circ\text{C}$ $T_C = 77^\circ\text{C}$	$I_F$	100 75	A
Surge non-repetitive forward current $T_C = 25^\circ\text{C}$ , $t_p = 10$ ms, sine halfwave	$I_{FSM}$	220	
Maximum repetitive forward current $T_C = 25^\circ\text{C}$ , $t_p$ limited by $T_{jmax}$ , $D = 0.5$	$I_{FRM}$	225	
Soldering temperature Wave soldering, 1.6 mm (0.063 in.) from case for 10s	$T_S$	260	$^\circ\text{C}$
Operating junction and storage temperature	$T_j, T_{stg}$	-55... +175	$^\circ\text{C}$

### Thermal and Isolation Characteristics


Parameter	Symbol	Max. Value	Units
<b>Characteristics</b>			
Thermal resistance, junction to case	$R_{thJC}$	0.65	K/W
Thermal resistance, junction to ambient, leaded	$R_{thJA}$	40	
Isolation voltage, RMS (measured between terminals and mounting base, 50-60 Hz, for 1-3 seconds)	$V_{iso}$	3000	V

### Electrical Characteristics, at $T_j = 25^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
<b>Static Characteristics</b>					
Reverse leakage current $V_R = 600\text{V}$ , $T_j = 25^\circ\text{C}$ $V_R = 600\text{V}$ , $T_j = 175^\circ\text{C}$	$I_R$	-	-	40 1000	$\mu\text{A}$
Forward voltage drop $I_F = 75\text{A}$ , $T_j = 25^\circ\text{C}$ $I_F = 75\text{A}$ , $T_j = 175^\circ\text{C}$	$V_F$	-	1.65 1.65	2.0 -	V

**Electrical Characteristics**, at  $T_j = 25^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
<b>Dynamic Characteristics</b>					
Reverse recovery time	$t_{rr}$	-	264	-	ns
$V_R = 300\text{V}$ , $I_F = 75\text{A}$ , $di_F/dt = 200\text{A}/\mu\text{s}$ , $T_j = 25^\circ\text{C}$ $V_R = 300\text{V}$ , $I_F = 75\text{A}$ , $di_F/dt = 200\text{A}/\mu\text{s}$ , $T_j = 125^\circ\text{C}$		-	548	-	
Peak reverse current	$I_{rm}$	-	8.3	-	A
$V_R = 300\text{V}$ , $I_F = 75\text{A}$ , $di_F/dt = 200\text{A}/\mu\text{s}$ , $T_j = 25^\circ\text{C}$ $V_R = 300\text{V}$ , $I_F = 75\text{A}$ , $di_F/dt = 200\text{A}/\mu\text{s}$ , $T_j = 125^\circ\text{C}$		-	12.9	-	
Reverse recovery charge	$Q_{rr}$	-	908	-	nC
$V_R = 300\text{V}$ , $I_F = 75\text{A}$ , $di_F/dt = 200\text{A}/\mu\text{s}$ , $T_j = 25^\circ\text{C}$ $V_R = 300\text{V}$ , $I_F = 75\text{A}$ , $di_F/dt = 200\text{A}/\mu\text{s}$ , $T_j = 125^\circ\text{C}$		-	2941	-	

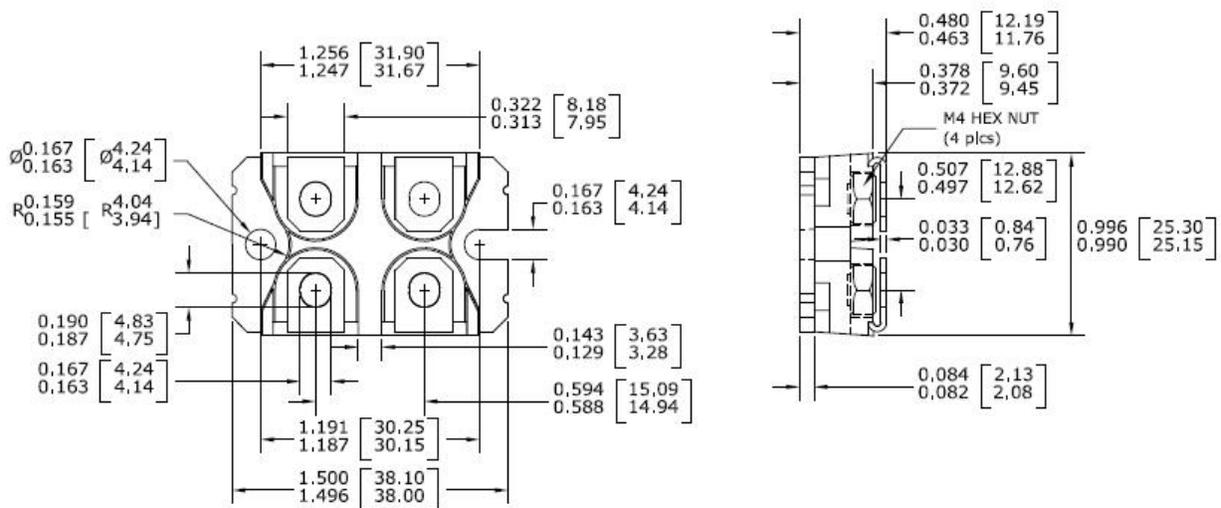**Package Outline Drawing**

**Disclaimer**

These specifications may not be considered as a guarantee of components characteristics. Components have to be tested depending on intended application as adjustments may be necessary. The use of **iQXPRZ Power Inc.** components in life support appliances and systems are subject to written approval of **iQXPRZ Power Inc.**